

## PINK POLY GUSSETED SHROUDS

20-019-60xx

Pink polyethylene antistatic shrouds

### Film construction

**LD/HD/LD polyethylene**

### Standard compliance

IEC 61340-5-1  
94/62/EC & 2002/95/EC (ROHS directives)

### Material and features

Material:	Pink Polyethylene with antistatic agent Amine free
Thickness:	80 $\mu$ (+/- 10%)
Surface resistance:	< 10 <sup>11</sup> Ohm
Charge generation:	< 100 Volts
MVTR:	$\leq 2.4 \text{ g/m}^2/24 \text{ h}$
Shelf life:	2 years





### Dimensions and Part Number

Part number	Dimensions
20-019-6025	1250 x (2x425) x 1850 mm
20-019-6027	1250 x (2x425) x 1600 mm
20-019-6029	579 x (2x196) x 745 mm

### Options

Other models on stock or on request  
Mono-layer LDPE gusseted shrouds also available (20-029-xxxx)

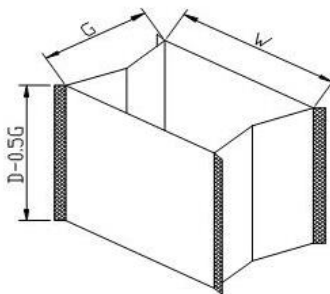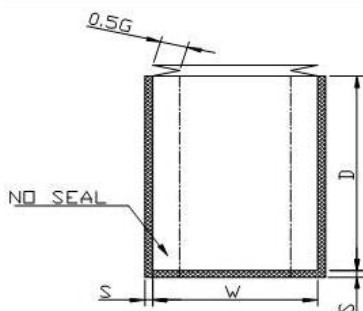

**G = Gusset**  
**W = Width**  
**S = Seal**  
**D = Depth**